



Tuff Tank - Plastic Effluent Tank

Technical Details*

Tuff Tank - the first, and still the best.

Detail	TT-500	TT-750	TT-1000
Volume (Litres / Gallons)	2,273 / 500	3,410 / 750	4,546 / 1,000
Length (mm)	3,000 mm		
Width (mm)	2,100 mm		
Height (mm) - see Note 1	485 mm	690 mm	900 mm
Dry Weight (KG) - ONLY MOVE, LIFT OR STACK WHEN EMPTY	140 KG	180 KG	220 KG
Wet Weight (KG)	2,413 KG	3,590 KG	4,766 KG
Flush capacity [@ 4 litre cistern flush]	567 flushes	854 flushes	1,138 flushes
Flush capacity [@ 6 litre cistern flush]	378 flushes	569 flushes	758 flushes
Shower capacity [@ 40 litres / shower] - see Note 2	57 showers	85 showers	114 showers
Elsan® Cartridge Empties [@ 12 litre chamber] - see Note 3	189 empties	284 empties	379 empties
Elsan® Cartridge Empties [@ 15 litre chamber]	151 empties	227 empties	303 empties
Elsan® Cartridge Empties [@ 21 litre chamber]	108 empties	162 empties	216 empties
High Level Alarm available	For all tanks		
Alarm (when fitted) notification at	1,929 litres	2,904 litres	3,870 litres
Linking Kits available	Side-to-side or nose-to-tail - for all tanks		
Standard Colour	Dark Grey	Further colours on request	
	Further Details:		
Note 1: Please allow clearance above tank for connecting inlet pipework e.g. 110mm	2 x Ø 5" / 125mm inlet hatches with screw cap and tether		
Note 2: Average shower duration is 5 to 8 minutes @ 8 litres flow per minute	2 x Ø 12" / 300mm extraction hatches with screw cap and tether		
Note 3: Each user will create 1.5 to 2 litres of toilet waste per day	4 x inbuilt lifting handles and sling guides		
	Deep forklift slots		
	Transportable and stackable when empty - flat or long edges		



***Please note:** tank sizes quoted are subject to a +/-3% variation. We reserve the right to amend the technical specification to improve the product without prior notification. Plastic process and material guarantee: 2 years based on UV8. This guarantee excludes damage due to misuse.



Tuff Tank - Plastic Effluent Tank

Dimensions (mm)

Please note: tank sizes quoted are subject to a +/-3% variation.

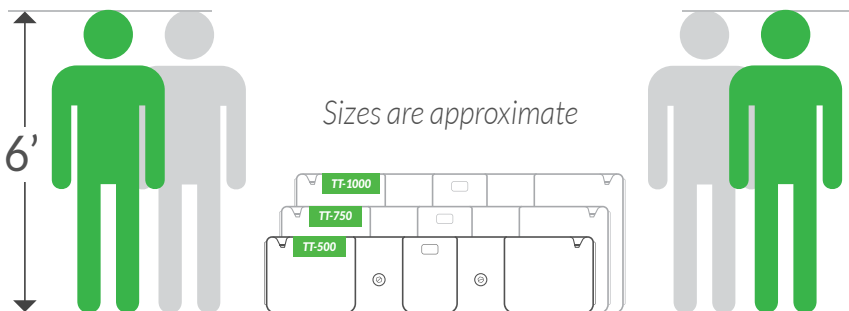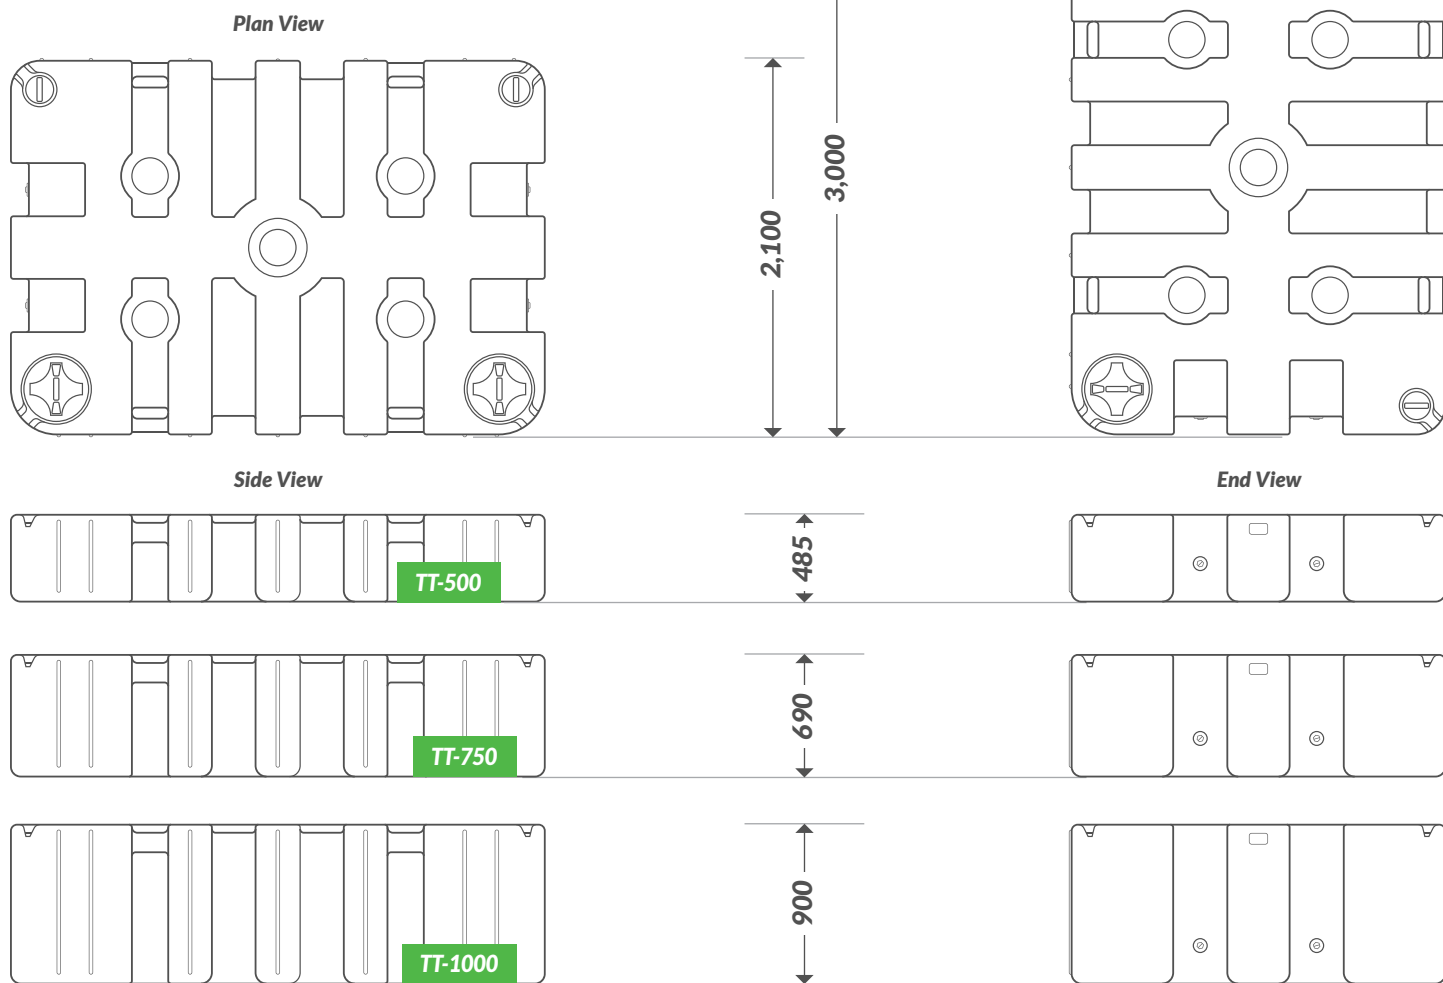

Contact us for more information.